




Bell & Gossett® Red Fox®

Wet Rotor Circulators

- 
- A collection of red-painted metal circulator pumps of various sizes and configurations, arranged in a cluster. Some are shown from the front, while others are shown from the side or back, highlighting their industrial design and mounting options.
- High starting torque provides years of trouble-free start-ups
 - Unique B&G DuraGlide™ Bearing System assures whisper-quiet, maintenance-free operation
 - Closed impeller design improves operating efficiency
 - Backed by B&G's representatives and a great 3-year warranty

Engineered for life


motralec
4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX
Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48
Demande de prix / e-mail : service-commercial@motralec.com
www.motralec.com

Bell & Gossett Wet Rotor Circulators


Reliable, maintenance-free, whisper quiet wet rotor circulators designed for residential and light commercial heating systems.




DuraGlide™ Bearing System (blue areas in cutaway illustration) incorporates several components working together to eliminate seasonal freeze-up

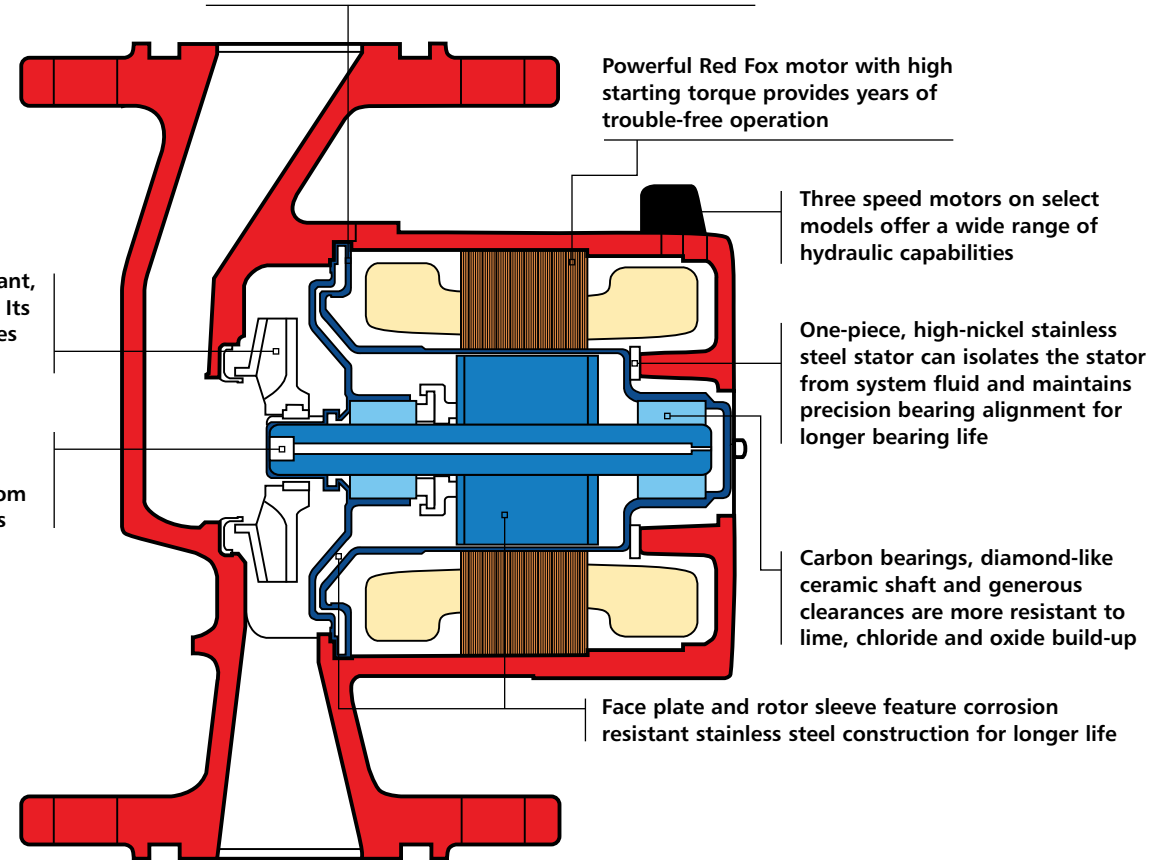

Single Speed NRF Circulator Performance Curves

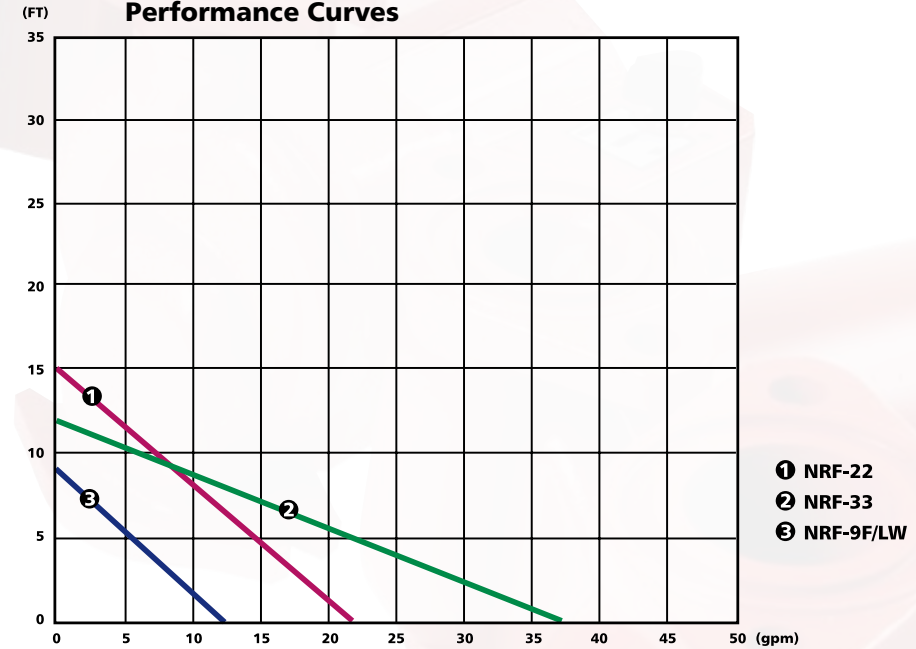

Three-Speed NRF Circulator Performance Curves

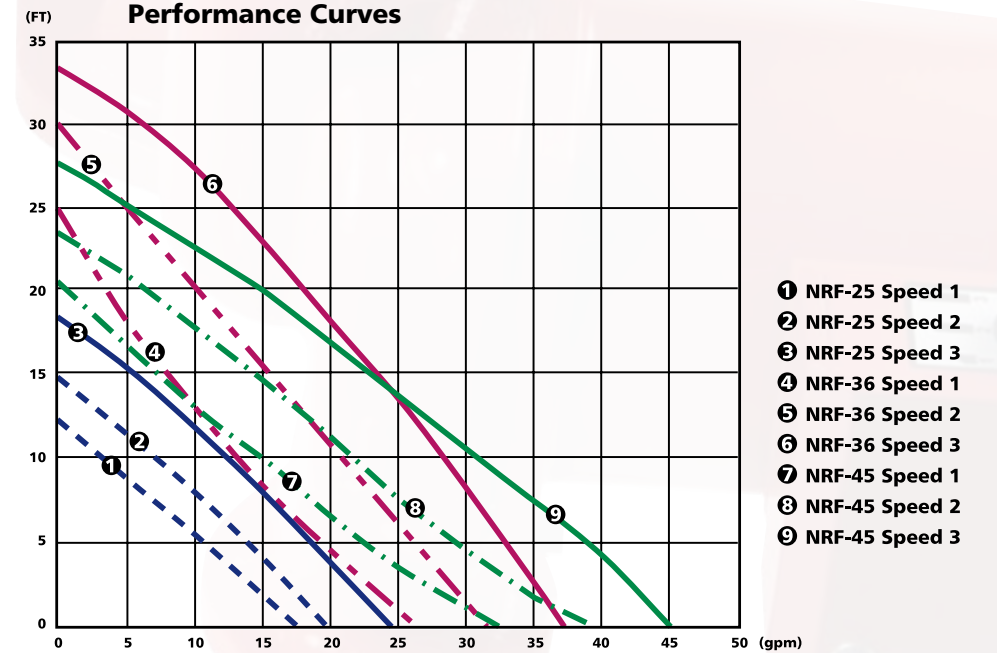

NRF-9



NRF-22



NRF-33



NRF-25



NRF-36



NRF-45

Description

A residential or light commercial, maintenance-free, axial flanged, in-line, cast iron, wet rotor circulation pump for hydronic heating systems. UL and cUL Listed.

Operating Data

Maximum working pressure 150 psi (10 bar)
 Maximum operating temperature
 NRF-22 and NRF-9F/LW 240°F (115°C)
 NRF-25, NRF-33, NRF-36 and NRF-45 225°F (107°C)

Construction Materials

Pump body Cast iron
 Impeller Noryl
 Shaft Ceramic
 Bearings Double-sintered Carbon


Warranty

Bell & Gossett offers a warranty of three years from date of manufacture or 18 months from date of installation (whichever comes first) against failure as a result of defects in materials or workmanship.

Dimensions

Model Number	Part Number	Flange Sizes Inches - NPT	Dimensions Inches (mm)			Standard 60 Cycle Motor Characteristics*					Shipping Weight lbs. (Kg)
			A	B	C	Watts	∅	Volts	F.L. Amps	RPM	
NRF-9F/LW	103267	3/4, 1, 1 1/4, 1 1/2	6 3/8 (162)	6 3/16 (157)	5 1/8 (130)	41	1	115	0.40	2800	9.3 (4.2)
NRF-22	103251		6 3/8 (162)	6 3/16 (157)	5 1/8 (130)	92			0.80	2940	9.3 (4.2)
NRF-25	103417		6 3/8 (162)	6 3/16 (157)	5 1/8 (130)	125			1.20	2950	10.4 (4.7)
NRF-33	103350		6 3/8 (162)	5 9/16 (141)	4 7/8 (124)	125			1.10	2950	10.4 (4.7)
NRF-36	103400		6 3/8 (162)	6 7/8 (175)	5 3/4 (146)	270			2.30	3300	13.1 (6.0)
NRF-45	103404	1, 1 1/4, 1 1/2	8 1/2 (216)	7 3/8 (187)	5 3/4 (146)	270		2.30	3300	14.5 (6.6)	

NRF-9F/LW, NRF-22, NRF-25 and NRF-33 are impedance protected.
 NRF-36 and NRF-45 are thermally protected.
 Dimensions are approximate and subject to change. Contact factory for certified dimensions.

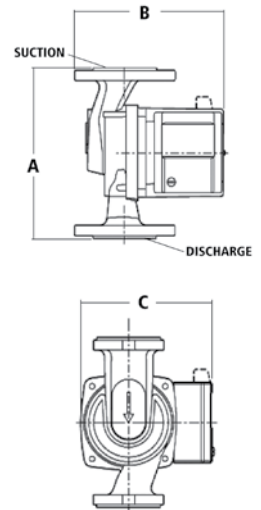

Our Pump Controllers



The TC-1 is a programmable timer control that allows the circulator to turn on and off automatically at preset times. This permits the pump to circulate hot water only during those times when high usage can be expected throughout the day.



NRF-VS Pump Control is a versatile variable speed control for use in hydronic heating and cooling applications. Water temperature is controlled by regulating the speed of the pump which injects water from a different temperature water loop into a controlled loop.



The ZoneTrol II AZ-1A is a single zone pump relay that turns the pump and boiler on when the thermostat calls for heat. The AZ-1A is ideal when adding a zone to an existing system and can be daisy-chained together to control multiple zones.



ITT

Engineered for life

motralec

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX
 Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48
 Demande de prix / e-mail : service-commercial@motralec.com

www.motralec.com