



# J / JH SERIES

THE RIGHT PUMP FOR  
TOUGH JOBS

## ELECTRIC SUBMERSIBLE SUMP PUMPS



### THE SOLUTION TO GENERAL WASTE-WATER PUMPING

HIGH HEAD OR HIGH VOLUME DRAINAGE OF CLEAN  
AND DIRTY WATER FROM SUMPS, BASINS AND TANKS IN PLANTS,  
COMMERCIAL, PUBLIC AND RESIDENTIAL FACILITIES.

**motralec**

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX  
Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48  
Demande de prix / e-mail : [service-commercial@motralec.com](mailto:service-commercial@motralec.com)  
[www.motralec.com](http://www.motralec.com)

# J and JH Submersible Pumps Superior Construction

## BJM air filled motors

- Class F insulation
- High temperature / amp protection
- 115, 230V – 1 phase
- 230, 460V – 3 phase
- 208, 575V available


## Double mechanical seals

- Lower: Silicon Carbide
- Upper: Carbon Ceramic
- Seal Minder™ optional (not available on J400)


## Accessories

- Slide rails
- Level switches
- Pump controls
- Alarm boxes
- ANSI flanges

**Cast iron volute and impeller 304SS motor housing for superior heat transfer.  
All J / JH models are available in 316SS for corrosive service.**

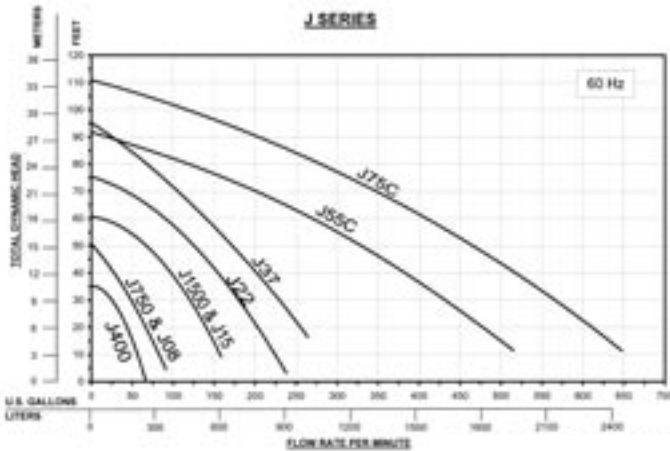

**SA**  
C US  
LR107915  
J400  
J750  
J1500  
J1500H  
J15  
J15H

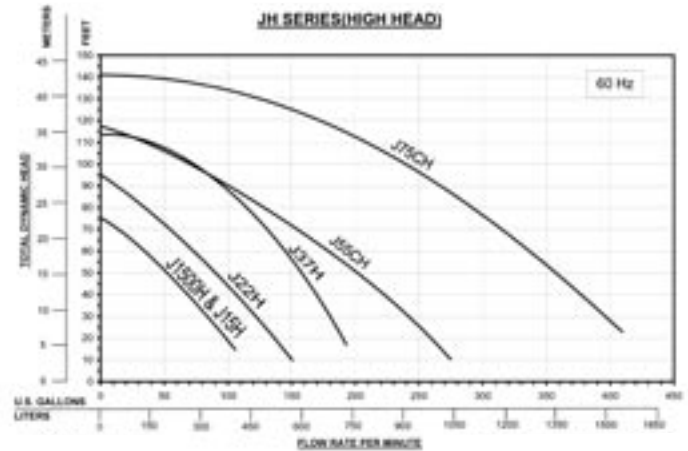

MODEL	DISCH. SIZE	H.P.	VOLT	PHASE	RPM	RATED AMPS	MAX SOLIDS	MAX HEAD	MAX GPM	WEIGHT LBS.	HEIGHT	WIDTH	CABLE
J400	2"	0.5	115/230	1	3450	7/3.5	1/8"	35'	66	38	15.7"	8.5"	33'
J750	2"	1	115/230	1	3450	14/7	3/16"	51'	91	66	17.3"	11.2"	33'
J1500	3"	2	230	1	3450	14	3/16"	60'	158	84	18.7"	12.5"	50'
J08	2"	1	230/460	3	3450	3/1.5	3/16"	51'	91	60	15.2"	11.2"	33'
J15	3"	2	230/460	3	3450	6/3	3/16"	60'	158	72	16.4"	11.2"	33'
J22	3"	3	230/460	3	3450	9/4.5	3/8"	75'	237	96	18.5"	12.5"	33'
J37	3" or 4"	5	230/460	3	3450	14/7	3/8"	95'	264	108	19.7"	12.5"	33'
J55C	4"	7.5	230/460	3	3450	21/10.5	3/8"	92'	515	233	25.5"	20.5"	33'
J75C	4"	10	230/460	3	3450	30/15	3/8"	110'	647	258	27.75"	20.5"	33'

MODEL	DISCH. SIZE	H.P.	VOLT	PHASE	RPM	RATED AMPS	MAX SOLIDS	MAX HEAD	MAX GPM	WEIGHT LBS.	HEIGHT	WIDTH	CABLE
J1500H	2"	2	230	1	3450	14	3/16"	75'	105	84	18.7"	12.5"	50'
J15H	2"	2	230/460	3	3450	6/3	3/16"	75'	105	66	16.4"	11.2"	33'
J22H	2"	3	230/460	3	3450	9/4.5	3/8"	95'	150	94	18.5"	12.5"	33'
J37H	2"	5	230/460	3	3450	14/7	3/8"	113'	192	108	19.7"	12.5"	33'
J55CH	3"	7.5	230/460	3	3450	21/10.5	3/8"	117'	274	227	25.5"	20.5"	33'
J75CH	4"	10	230/460	3	3450	30/15	3/8"	141'	409	252	27.75"	20.5"	33'

WARNING: NOT FOR USE IN ANY FLAMMABLE LIQUIDS.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.



**motralec**

4 rue Lavoisier . ZA Lavoisier . 95223 HERBLAY CEDEX

Tel. : 01.39.97.65.10 / Fax. : 01.39.97.68.48

Demande de prix / e-mail : [service-commercial@motralec.com](mailto:service-commercial@motralec.com)

[www.motralec.com](http://www.motralec.com)